

# Vacuum Gravity Separator



## About This Product

Forsberg's Vacuum Gravity Separators have a reputation of being the most accurate and efficient dust-free separators available! This is possible due to the control of three essential elements:

- Air flow
- Speed of vibration
- Deck differential action


The vacuum gravity air system assures a complete and accurate product density classification from a very lightest to a very heavy product.

The easy to adjust divider blades provide unlimited control of the discharge product.

Forsberg Gravity Separators are constructed of high grade steel which provides years of trouble-free performance. All of Forsberg's Gravity Separators include, a counterbalanced eccentric drive for quiet, vibration-free operation.

Numerous options including an enclosed frame or a sanitary frame are available to meet the needs and demands of each customer in all industries.

Contact Forsberg's for your free product evaluation to ensure complete customer satisfaction prior to your purchase.

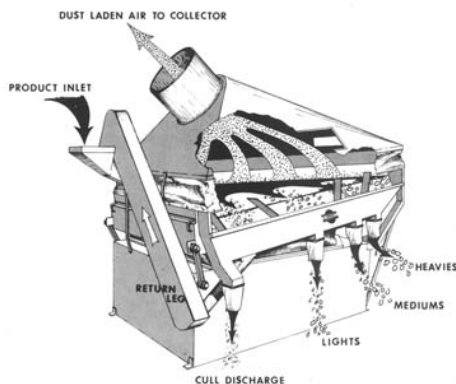

## Specifications

Model	Weight	Floor size	Horse power	Deck size	CFM Range
40 - VMS	1100 lbs. (499 kg)	52 x 92 in.	Drive: 1 HP	11.6 sq. ft.	1000 to 5000
50 - VMS	1400 lbs. (635 kg)	64 x 106 in.	Drive: 1 HP	19.0 sq. ft.	1000 to 7000
90 - V	3100 lbs. (1406 kg)	78 x 123 in.	Drive: 2 HP	29.5 sq. ft.	3000 to 12,000
250 - V	3900 lbs. (1769 kg)	85 x 139 in.	Drive: 3 HP	37.3 sq. ft.	5000 to 14,000
300 - V	4200 lbs. (1970 kg)	89 x 100 in.	Drive: 3 HP	41.6 sq. ft.	6000 to 18,000

\* CFM Range dependent on product and separation required. Testing to confirm.