


SP10L 3450 RPM



IMPELLER TYPE = ENCLOSED	STD. SHAFT DIA. = 1.500"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO. = SP10L	MAX. SHAFT DIA. = 1.500"	1	-4	IMP. - C.I.	-3
IMPELLER WT. - LBS. = 8.1	STD. LATERAL = .94"	2	-3	IMP. - NI-RI	-2
ONE STAGE WT. - LBS. = 190.0	DISCHARGE SIZES = 6" / 8"	3	-2	IMP. - S.S.	-3
ADD'L STAGE WT. - LBS. = 75.0	SUCTION SIZES = 6" / BELL	4	-1	BOWL - BRZ.	-2
MAX. SPHERE SIZE = .50"	ONE STAGE WR ² = .295	5	0	BOWL - NI-RI	-1
MIN. SUBMERGENCE* = 14"				BOWL - S.S.	-3

Δ CONSULT FACTORY v18.1

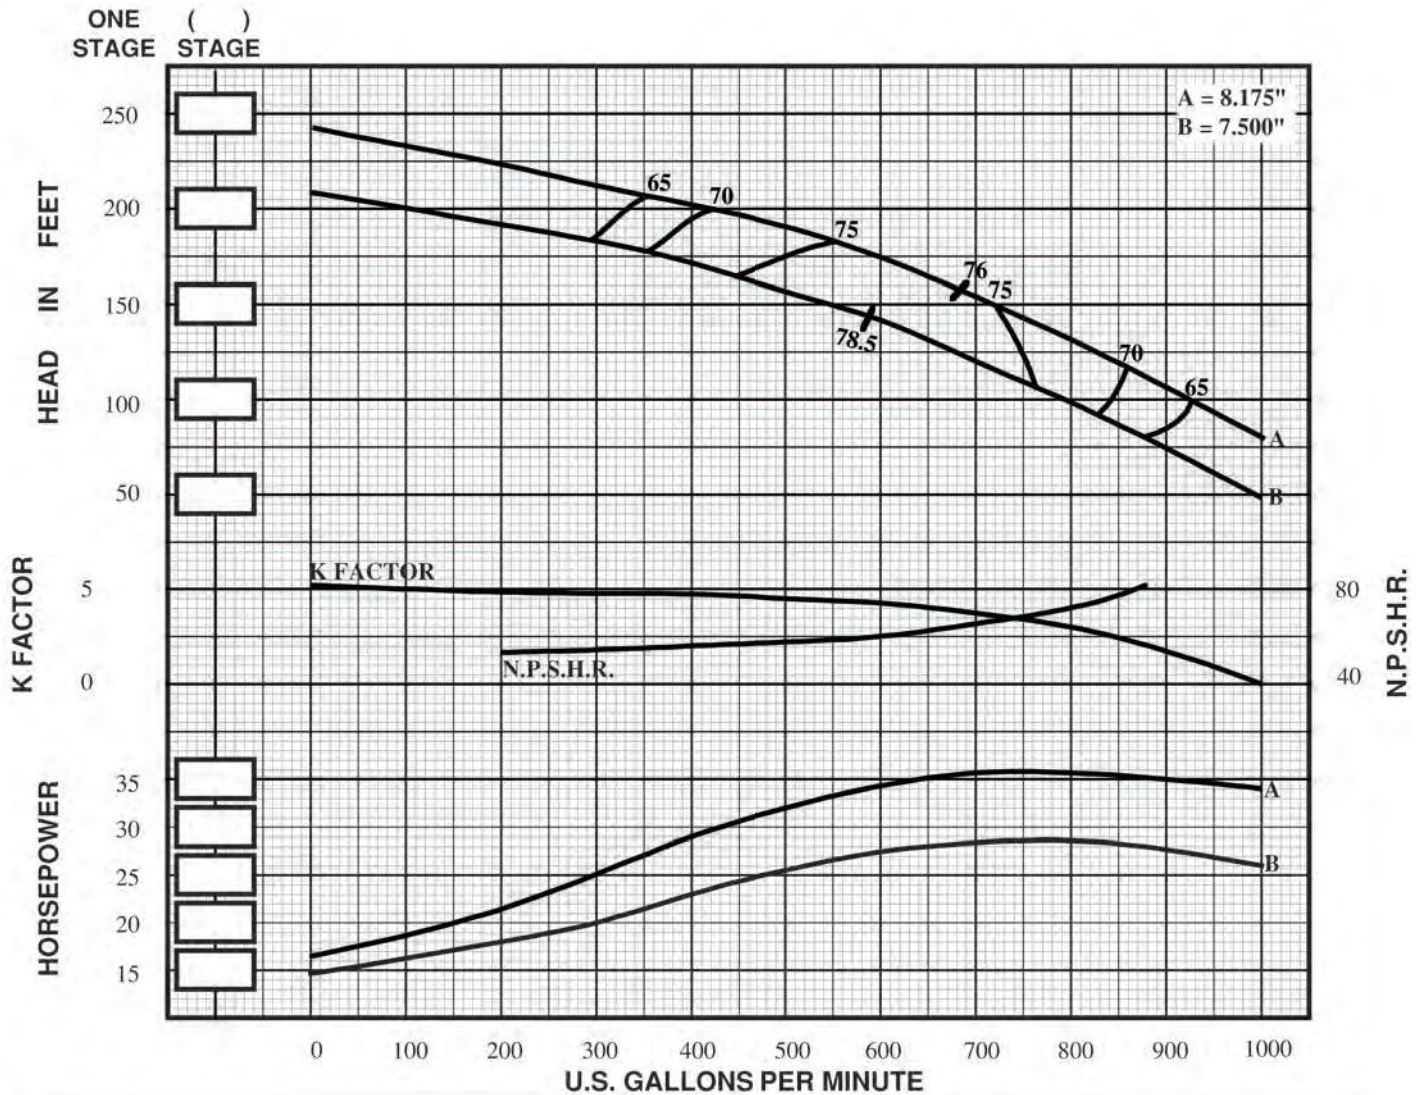