

959 Mearns Road
 Warminster, PA 18974
www.TeikokuPumps.com
 ☎ 215-343-6000
 ☎ 267-486-1037

5880 Bingle Road
 Houston, TX 77092
www.TeikokuPumps.com
 ☎ 713-983-9901
 ☎ 713-983-9919

St. Rt. 2 North
 Belmont, WV 26134
www.TeikokuPumps.com
 ☎ 304-684-2459
 ☎ 304-684-7593

Proposal

Date	Quote No.	Inquiry No.	Project Name	Terms (in US Currency)	
7-30-2014	2014-18291 Rv2			Net 30	
To:			Representative for Teikoku USA, Inc.		
Rick Vondra Patriot Renewable Fuels, LLC			Travis Munn Superior Industrial Equipment		
Address:			1609 Afton Road Sycamore, Illinois 60178		
P.O. Box 560 Annawan, Illinois 61234					
Country:			United States		
Phone:			815-899-8900		
Fax:			815-899-8898		
Email:			tmunn@superiorpumps.com		
rvondra@patriotethanol.com					
We promise to furnish the equipment listed below at the price shown subject to Teikoku USA's Conditions of Sale. FOB Factory					
Item No.	Equip No.	Quantity	Pump Model	Unit Price	Total Price
11	P-508	1	F60-3215N4BL-0204SF1-AV	\$4,813.20	\$4,813.20
Application Data:		Materials of Construction:		Motor Data:	
Fluid:	Methyl Oleate	Pump Case:	316 SS	Insulation:	H
TDH (feet):	152.2	Impeller:	316 SS	Frame:	3215
Capacity (GPM):	15.0	Gaskets/O-rings:	PTFE	Stator Fill:	None
Specific Gravity:	0.8	Rotor Liner:	316L SS	Voltage:	460
Viscosity (cps):	0.861	Stator Liner:	Hast C	Phase:	3
Op. Temp. (F):	252.5	Brg. Hsg./Adapter:	316 SS	Hertz:	60
Vapor Press. (psia):		Shaft:	316 SS	RPM:	3450
Sp. Ht. (BTU/lbmF):		Bearings:	Carbon Graphite	Design Power (HP)	1.79
Suct. Press. (psig):		Journal/Sleeves:	316 SS Hard Chrome	Runout Power (HP):	3.08
Dsch. Press. (psig):		Suct. Conn:	1.5 / 150# RF	Motor Rating (HP):	5.8
Diff. Press. (psi):	52.7	Dsch. Conn.:	1.0 / 150# RF	F.L. Amp:	9.4
NPSHAvail. (feet):		Case Drain:	1/2 in. NPT	F.L. KW:	4.4
NPSHReq. (feet):	2.14	Circ. Assy.:	None	Start KVA:	41.33
Eff. @ Diam. (%):	25.7	Circulation Path:	Internal	Motor Rating:	TELC
Imp. Diam. (in):	6.125	Net Wgt. (lbs):	176	Area Class:	Class 1, Group D, Div 2
Design Pressure	150 psi				
Options:			Thermal TCO (F): 356		
Standard TRG bearing wear monitor included.			Perf. Curve No.:		
			Bulletin Number:		
			Outline Dwg.:		
			Shipment: 2 weeks		
			(wks) after drwg. approval or mfg. release.		
			Comments:		


Thank you for your inquiry.
 Please feel free to visit our website at: www.TeikokuPumps.com
 Abhilash Abraham/AE x 2847

959 Mearns Road
 Warminster, PA 18974
www.TeikokuPumps.com
 ☎ 215-343-6000
 📠 267-486-1037

5880 Bingle Road
 Houston, TX 77092
www.TeikokuPumps.com
 ☎ 713-983-9901
 📠 713-983-9919

St. Rt. 2 North
 Belmont, WV 26134
www.TeikokuPumps.com
 ☎ 304-684-2459
 📠 304-684-7593

Pump Data Sheet
Equipment Number: P-508
Service: Post ME Dryer Flash Vessel Drain Pump
Quote Number: 2014-18291 Rv2

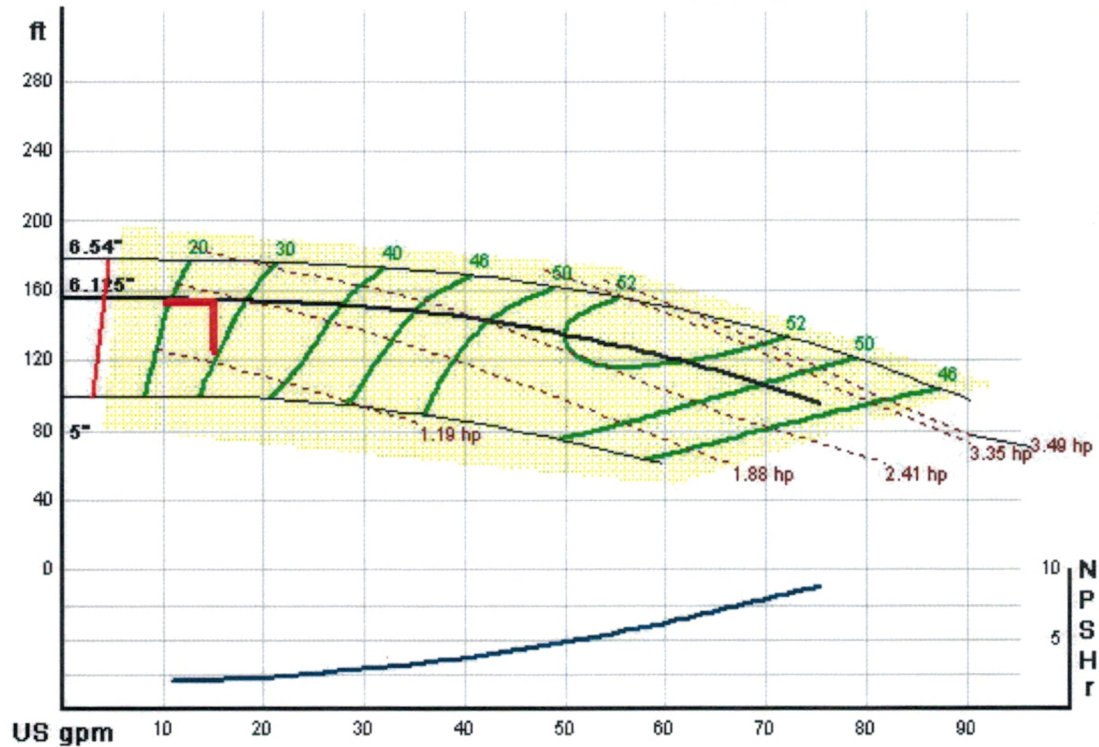

Pump Properties	
Model	=F60-3215N4BL-0204SF1-AV
Frame Size	=
Suction	= 1.5
Discharge	= 1.0
Frame	= 3215

Application Properties	
Flow	= 15.0 (GPM)
Head	=152.2 (feet)
Speed	=3450 (RPM)
Diameter	=6.125 (in)
Power	= 1.79 (hp)
NPSHr	=2.14 (feet)
Minimum Flow	=3.91 (GPM)

Pump Drawings

[Outline Link](#)

[Cross Section Link](#)